


Stabilization that feels right.

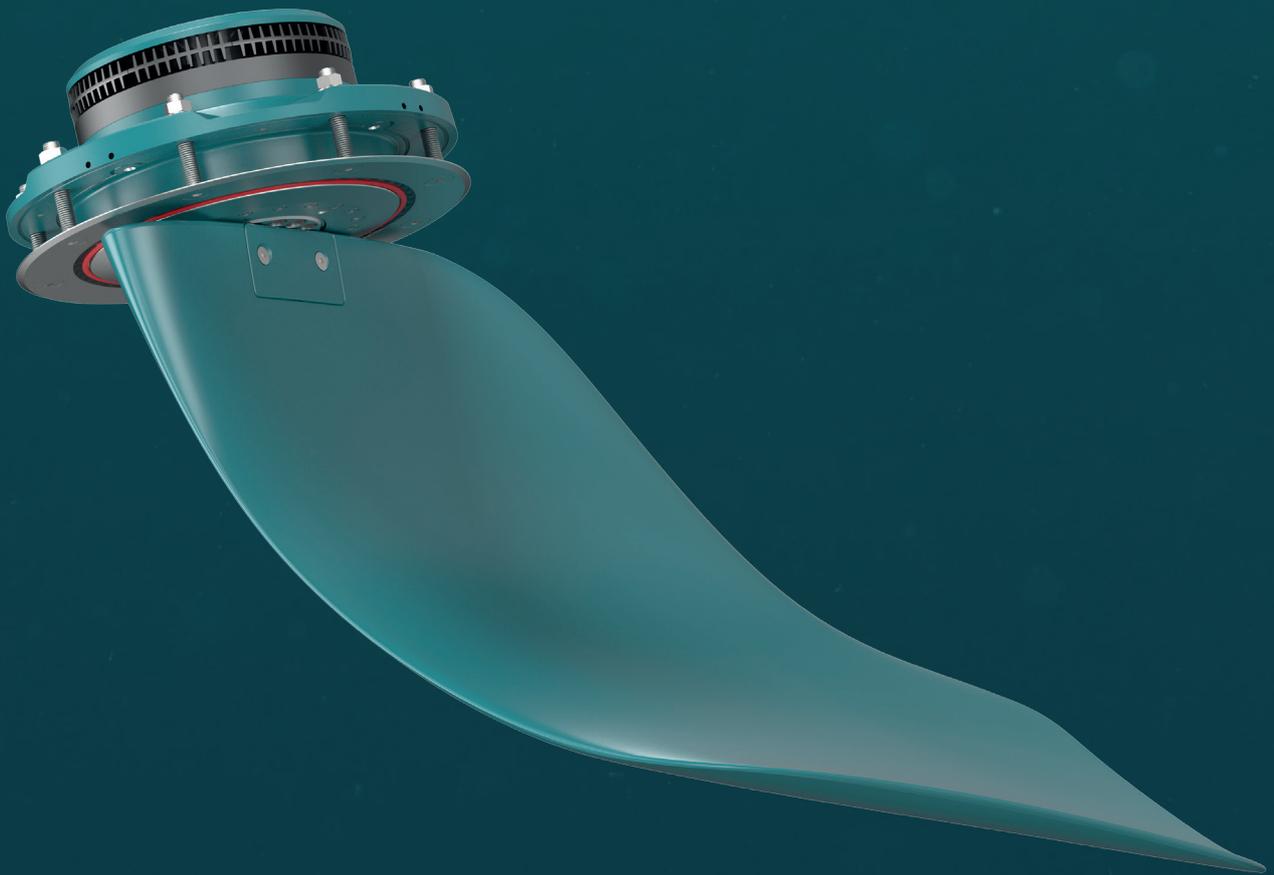

SLEIPNER STABILIZERS
ELECTRIC VECTOR FINS


A patented fin design like no other

Backed by over a decade of dedicated R&D and proven in over 2,200 installations, Vector Fins offer a unique approach to yacht stabilization. The patented curved fin design channels stabilization forces more vertically, achieving high efficiency with much lower energy use than traditional systems.

A more comfortable ride

Vector Fins employ algorithms that adapt perfectly to the rhythm of the sea, providing unwavering stability and a smoother experience onboard.

At anchor, enjoy up to 90% roll reduction - outperforming the competition and redefining comfort on the water.

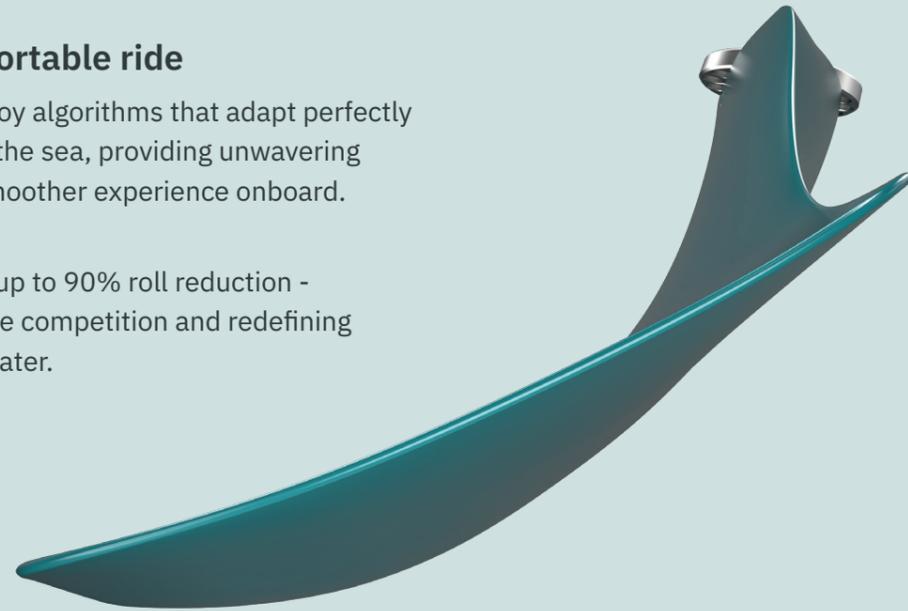


Smooth, efficient, unmatched

Vector Fins redefine what stabilization can achieve, offering a range of advantages that improve both your experience on the water and the efficiency of your vessel.

- **Smooth ride:** Enhanced roll stabilization keeps your boat steady, delivering comfort and safety in all conditions.
- **Fuel efficiency:** The unique fin shape generates lift, reducing drag and improving fuel economy, making faster boats more efficient.
- **Compact and versatile:** The compact actuator design allows seamless integration with any yacht, preserving space without compromising performance.
- **Dual functionality:** Effective stabilization at both high speeds and at anchor, providing comfort whether you're underway or at rest.
- **Quiet operation:** A patented technology reduce structural born noise.
- **Sustainable performance:** With up to 80% less power usage at anchor, Vector Fins deliver double the stabilizing force per kW - giving you powerful stabilization with a lighter environmental footprint.

**Stability at sea. Comfort at anchor.
Experience both.**

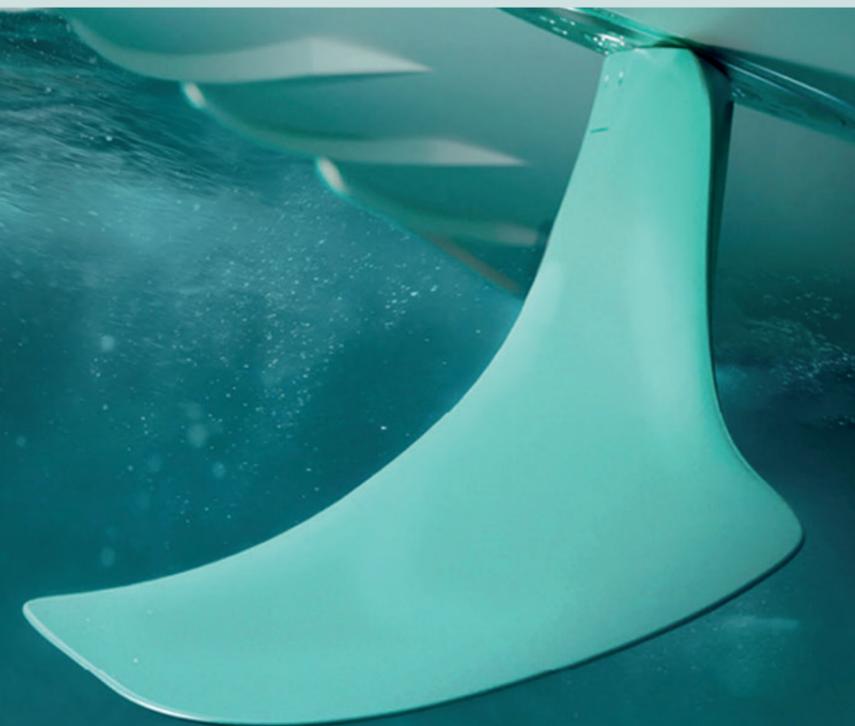

Control the roll with powerful algorithms

Vector Fins bring stabilization to a new level with its intelligent software system. The system's algorithms work in real-time to deliver smooth transitions and responsive control over your boat's stability, enhancing both performance and comfort.

Advanced control features

- **Intuitive touchscreen display:** Effortlessly monitor and adjust stabilization settings with a sleek, user-friendly interface.
- **Algorithm-powered responsiveness:** Integrated GPS and rudder inputs work in tandem with advanced algorithms to adapt automatically, delivering smooth transitions in all conditions.
- **Remote diagnostics and service:** Access real-time diagnostics, remote support, and software updates via onboard Wi-Fi, ensuring your system operates safely at all times.
- **Multifunctional display integration:** Easily connect with existing onboard systems for a unified, streamlined experience.

Control modes

- **Dock Mode:** Limits fin movement to keep them closer to the hull, reducing risk of contact with docks or nearby boats when maneuvering in tight spaces.
- **Eco Mode:** Reduces power consumption to extend battery life during stabilization.
- **Dynamic Positioning Mode:** Prevents fin lock when reversing or holding position at low speeds, giving you better control.
- **Fishing Mode:** Automatically adjusts the fins to reduce strain during fast or forceful movement, even in standby.
- **Park Mode:** Moves the fins to a dedicated parking position for docking, different from the standard centered position used when stopping the system.



Ready to experience unmatched stability?

Our team collaborates with yacht builders, designers and owners to create stabilization systems tailored to your vessel's performance goals and installation need - from consultation to final installation, every detail is covered.




Multifunctional display integration

Tailored stabilization for every yacht

Sleipner offers a versatile range of Vector Fins stabilizers, engineered to meet the unique needs of yachts of all sizes. Our product line ensures that whether you have a compact cruiser or a luxury superyacht, there's a solution perfect for your vessel.

Technical highlights

- **Various fin sizes:** Designed to accommodate a wide range of yacht dimensions and displacement characteristics.
- **2- or 4-fin setups:** Configurable to operate seamlessly as integrated systems. The 2-fin setup is ideal for mid-sized yachts, while the 4-fin setup provides advanced stabilization for larger vessels.
- **Power options:** Available in multiple voltage configurations, including 24V, 48V, 230V single-phase, and 400V three-phase systems, to suit your yacht's electrical setup.
- **Robust materials:** Constructed using high-quality aluminum, composite, and stainless steel components for maximum durability in marine environments.

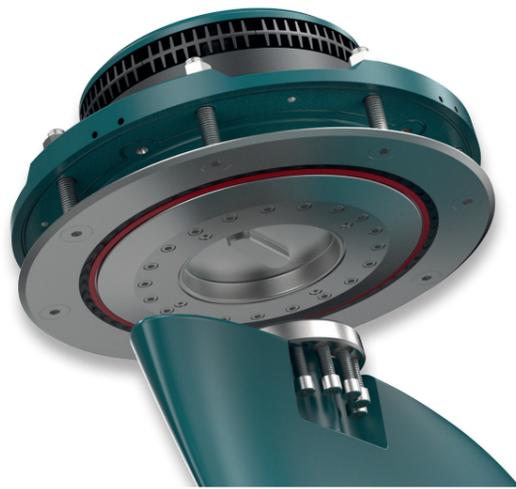

Actuators built for precision and efficiency

Renowned for their compactness and energy efficiency, Sleipner's electric actuators deliver unmatched stability control with minimal space requirements. Designed to fit even the most space-restricted engine rooms, they adjust fin positioning continuously using advanced algorithms, ensuring reliable stability in any sea conditions.

Key features

- **Compact design:** The slim profile allows for easy installation, even in tight spaces.
- **Efficient performance:** Energy-efficient design ensures optimal control without compromising power.
- **Built for durability:** A modular structure facilitates straightforward servicing and low maintenance costs.
- **Quiet operation:** Patented noise reduction technology ensures peace and quiet aboard.

Save energy without sacrificing performance.



Vector Fins™ V3-9
Actuators SPS40E

© Ronan Gladu / BENETEAU

Vector Fins - an optimized solution for any vessel

Actuator Data Figures | DC Electric

| Actuator model | SPS40E-24/48V | SPS50E-24/48V | SPS60E-24/48V | SPS70E-48V |
|--|---------------|---------------|---------------|------------|
| Power supply (VDC) | 24/48 | 24/48 | 24/48 | 48 |
| Typical vessel size (m) – 2 fins | 14 - 18 | 14 - 21 | 19 - 24 | 23 - 30 |
| Typical vessel size (m) – 4 fins | 18 - 26 | 18 - 26 | 30 - 40 | 35 - 50 |
| Actuator weight (kg) | 72 | 102 | 122 | 177 |
| Hull thickness (mm) | 50 | 55 | 60 | 80 |
| Flange dia x height inside hull (mm) | Ø450 x 170 | Ø471 x 171 | Ø564 x 230 | Ø614 x 241 |
| Under development - expected availability: | | | | Q3-2026 |

Actuator Data Figures | AC Electric

| Actuator model | SPS60E | SPS70E | SPS80E | SPS90E | SPS100E | SPS110 | SPS120E |
|--------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------------|--------------------|------------|
| Power supply (AC) | 230(1Φ/3Φ) 400(3Φ) | 230(1Φ/3Φ) 400(3Φ) | 230(1Φ/3Φ) 400(3Φ) | 230(1Φ/3Φ) 400(3Φ) | 230(3Φ) 400(3Φ) | 230(3Φ) 400(3Φ) | 400(3Φ) |
| Typical vessel size (m) – 2 fins | 19 - 24 | 23 - 30 | 29 - 38 | 29 - 38 | 36 - 45 | 36 - 45 | TBA |
| Typical vessel size (m) – 4 fins | 30 - 40 | 35 - 50 | 45 - 60 | 45 - 60 | 55 - 65 | 55 - 65 | TBA |
| Actuator weight (kg) | 118 | 187 | 296 | 462 | 490 | 571 | 571 |
| Hull thickness (mm) | 60 | 80 | 105 | 250 | 150 | 250 | 250 |
| Flange dia x height inside hull (mm) | Ø564 x 175 | Ø614 x 256 | Ø705 x 247 | Ø705 x 247 | Ø815 x 286 | Ø815 x 286 | Ø815 x 286 |

Recommended¹⁾ Vector Fins

| Actuator model | SPS40E | SPS50E | SPS60E | SPS70E | SPS80E | SPS90E | SPS100E | SPS110E | SPS120E |
|-------------------------------|--------|---------|---------|---------|---------|---------|---------|---------|---------|
| Boat speed up to 23 knots | V3-9 | V4-12 | V3-14 | V4-21 | V3-23 | V3-23 | V5-31 | V5-31 | V5-39 |
| Boat speed up to 30 knots | V4-10 | V4-12 | V4-15 | V4-21 | V4-26 | V4-26 | V5-31 | V5-31 | V5-39 |
| Boat speed up to 35 knots | V4-8 | V4-10MS | V4-15 | V4-19 | V4-26 | V4-26 | V4-26HS | V4-26HS | n/a |
| Boat speed above 35-40 knots* | n/a | V4-8HS | V4-12HS | V4-15HS | V4-21HS | V4-21HS | V4-26HS | V4-26HS | n/a |

¹⁾ The boats natural roll period must also be considered for maximum fin size per actuator.

^{*)} For speeds above 40 knots, please contact Sleipner for support.

© Sleipner Group

Sleipner Group is committed to continuous improvement in product specifications, design, and manufacturing. As a result, changes may occur without prior notice. While every effort is made to keep this brochure up to date, it should not be regarded as a definitive guide to current specifications, nor does it constitute a formal offer for sale of any specific product. Some images featured in this brochure are 3D renderings and may differ slightly in color or texture from the final product. All Sleipner products comply with the relevant CE directives.